



iColor Accent MX **Powercore**

BCP495 100xLED-LP/RGB 100-240V

Red, green and blue - Polycarbonate bowl/cover UV-resistant -610 mm - Aluminum

iColor Accent MX Powercore is a direct view linear LED fixture ideally suited for creating long ribbons of color and color-changing effects. Variable resolution offers the precision to display large-scale video, graphics, and intricately designed effects in a host of architectural, retail, and entertainment settings. iColor Accent MX Powercore offers the efficiency and cost-effectiveness of Powercore technology in an outdoor-rated, road-ready aluminum housing.;Integrated Powercore technology ensures rapid, efficient and accurate control of power output to the fixture directly from line voltage, eliminating the need for external power supplies. For more information please visit www.colorkinetics.com/ls/rgb/accentmx.

Product data

General Information	
Number of light sources	100 pcs
Lamp family code	LED-LP [LED Low Power]
Light source color	Red, green and blue
Light source replaceable	No
Driver included	Yes
Optical cover/lens type	Polycarbonate bowl/cover UV-resistant
Protection class IEC	Safety class I
CE mark	CE mark
Lifetime to 70% luminous flux	50000 h

Operating and Electrical		
Input Voltage	100 to 240 V	
Input Frequency	50 to 60 Hz	
Controls and Dimming		
Dimmable	Yes	
Mechanical and Housing		
Length	610 mm	
Color	Aluminum	

iColor Accent MX Powercore

Approval and Application		
Ingress protection code	IP66 [Dust penetration-protected, jet-	
	proof]	
Initial Performance (IEC Compliant)		
Initial luminous flux (system flux)	164 lm	
Initial LED luminaire efficacy	9 lm/W	
Initial input power	20 W	
Over Time Performance (IEC Compliant)		
Lumen Maintenance 50% at 50°C Reported 50000		


-20 to +50 °C

Product Data	
Product Data	
Full product code	871794388417999
Order product name	BCP495 100xLED-LP/RGB 100-240V
EAN/UPC - Product	8717943884179
Order code	910503701068
Numerator - Quantity Per Pack	1
Numerator - Packs per outer box	4
Material Nr. (12NC)	910503701068
Net Weight (Piece)	1.900 kg

Dimensional drawing

Application Conditions

Ambient temperature range

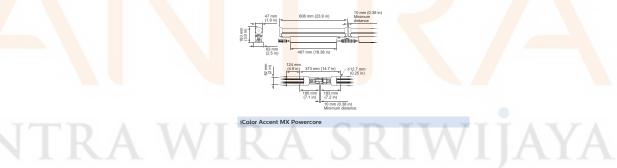



© 2019 Signify Holding All rights reserved. Signify does not give any representation or warranty as to the accuracy or completeness of the information included herein and shall not be liable for any action in reliance thereon. The information presented in this document is not intended as any commercial offer and does not form part of any quotation or contract, unless otherwise agreed by Signify. All trademarks are owned by Signify Holding or their

Datasheet, 2019, September 20 data subject to change

www.lighting.philips.com 2019, September 20 - data subject to change