



# MASTER MHN-SA

## MASTER MHN-SA 2000W/956 400V XW UNP/1

Compact quartz metal halide lamps with double-pin

### Product data


General Information	
Cap-Base	X830R [ X830R]
Bulb Shape	TD40 [ TD 40mm]
Operating Position	P15 [ Parallel +/-15D or Horizontal(HOR)]
Life To 5% Failures (Nom)	1000 h
Life To 10% Failures (Nom)	1400 h
Life To 20% Failures (Nom)	2100 h
Life To 50% Failures (Nom)	3700 h
Light Technical	
Color Code	956 [ CCT of 5600K]
Luminous Flux (Rated) (Nom)	200000 lm
Color Designation	Daylight
Lumen Maintenance 1000 h (Nom)	88 %
Lumen Maintenance 2000 h (Nom)	79 %
Lumen Maintenance 5000 h (Nom)	70 %
Chromaticity Coordinate X (Nom)	330
Chromaticity Coordinate Y (Nom)	362
Correlated Color Temperature (Nom)	5600 K
Luminous Efficacy (rated) (Nom)	98 lm/W
Color Rendering Index (Nom)	90
Operating and Electrical	
Lamp supply voltage	400 V [400]
Power (Rated) (Nom)	2040.0 W
Lamp Current Run-Up (Max)	17 A
Lamp Current (EM) (Nom)	11.3 A
Ignition Supply Voltage (Min)	360 V
Voltage (Max)	220 V
Voltage (Min)	185 V
Voltage (Nom)	205 V
Controls and Dimming	
Dimmable	No
Mechanical and Housing	
Bulb Finish	Clear
Cap-Base Information	-
Approval and Application	
Energy Efficiency Label (EEL)	A+
Mercury (Hg) Content (Nom)	225 mg
Energy Consumption kWh/1000 h	2244 kWh
UV	
Specific Eff. Radiant Power	60 mW/klm
Luminaire Design Requirements	
Bulb Temperature (Max)	980 °C

### MASTER MHN-SA

Pinch Temperature (Max)	300 °C
Product Data	
Full product code	871150020079200
Order product name	MASTER MHN-SA 2000W/956 400V XW UNP/1
EANUPC - Product	8718291548287
Order code	928099105129

Numerator - Quantity Per Pack	1
Numerator - Packs per outer box	1
Material Nr. (12NC)	928099105129
Net Weight (Piece)	110.000 g
ILCOS Code	MN-2000-E-X830R-/H

### Dimensional drawing

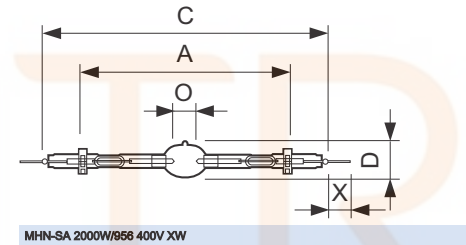

Product	D	O	X	A	C
---------	---	---	---	---	---

